

## DESCRIPTION

- Metal construction with various finishes identified by suffix
- 1/2" copper connections
- Designed to be installed through 2, 1-1/4" min. dia. and 1, 1" min. dia holes, 8" on center
- Adjustable for non-8" centers
- Includes hot and cold indicators
- For use with S947 valve

## OPERATION

- Lever handles
- Maximum handle rotation angle is 90° to full on for either handle
- Rotate hot side handle counterclockwise to open and clockwise to close
- Rotate cold side handle clockwise to open and counterclockwise to close

## FLOW

- Flow is limited to 1.5 gpm max (5.7 L/min) at 60 psi, for products made before October 2008 flow is limited to 2.2 gpm max. (8.3 L/min)
- Features a laminar flow pattern for dramatic water presentation

## CARTRIDGE


- 1224 cartridge design with nonmetallic/nonferrous and stainless steel materials

## STANDARDS

- Third party certified to WaterSense® CSA B125.1, ASME A112.18.1, ICC A117.1 and all applicable requirements referenced therein
- Certified to ANSI/NSF 61/9
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- **ADA** ♿ for lever handles



## WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

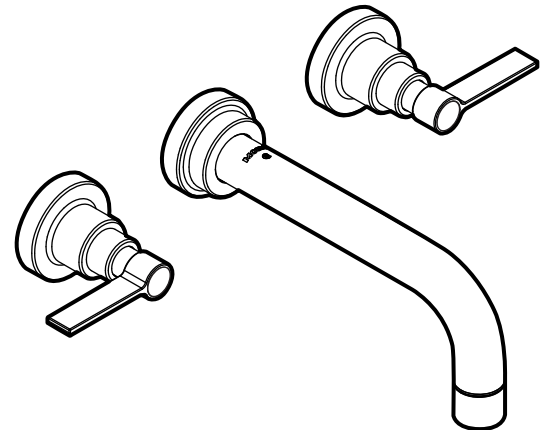

## SOLACE™ Two-Handle Wall Mount Faucet Trim

Models: TS476 series

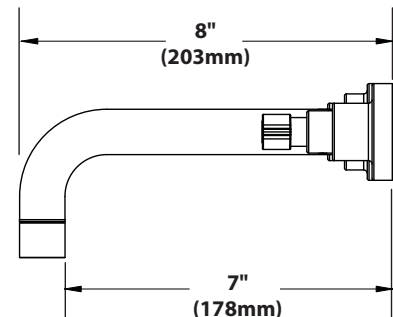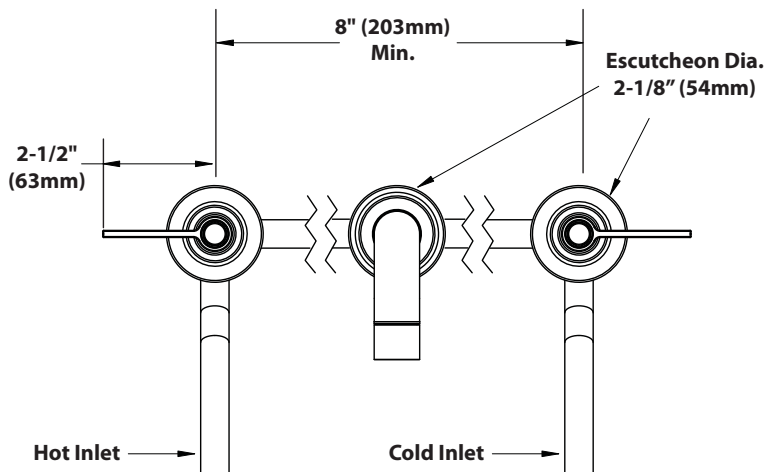

**MAX WALL THICKNESS**  
1-3/4" (45mm)

## CRITICAL DIMENSIONS

(DO NOT SCALE)